



CLASSIC[®] *SERIES* **MINI REFLEX SIGHT**
MANUAL

Thank you for choosing this Primary Arms optic.

If you have any questions about your new optic or any of our other products, visit us at www.primaryarmsoptics.com, email us at info@primaryarmsoptics.com, or give us a call toll-free at 855-774-2767. The customer service team at our headquarters in Houston, Texas will respond promptly.


If you have any problems with a Primary Arms product, we urge you to contact us immediately and let our customer service professionals handle the situation for you. There is no need to return your optic to the retailer.

*View back cover for lifetime warranty information.

TABLE OF CONTENTS

Page 3	Introducing: Primary Arms Classic Series Mini Reflex Sight
Page 4	Achieving a Clear Reticle Picture PLEASE READ THIS FIRST
Page 5	How to Set Reticle Illumination
Page 5	Zeroing
Page 7	Mounting Options
Page 7	Dot Size
Page 7	Features
Page 9	Lens Care

CLASSIC SERIES MINI REFLEX SIGHT

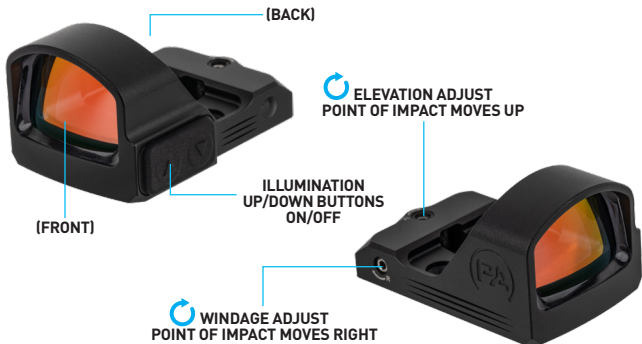

HOW TO ACHIEVE A CLEAR RETICLE PICTURE

If you wear prescription glasses or contact lenses, make sure to put them on before looking through the sight. To achieve a clear, crisp dot, look through the sight and focus on the target, not the dot. Shoot with both eyes open! It can also be

helpful to turn the dot's brightness down a bit, until the dot can just be seen clearly contrasted against the background.

HOW TO SET RETICLE ILLUMINATION

There are two buttons on the optic's left side. The forward button is marked with an up arrow, and the rear button is marked with a down arrow.

To turn the optic on, press either button and hold it for three seconds. This activates the reticle.

To increase the reticle brightness, tap the 'up' button.

To decrease reticle brightness, tap the 'down' button.

To turn the optic off, press BOTH buttons and hold for three seconds. This deactivates the reticle.

NOTE: If the reticle does not appear, you may need to replace the battery. To do this, unscrew the optic and remove it from its mounting position. Remove the old battery and insert a new CR2032 battery in its place. You may then reinstall the optic on your firearm or mount.

ZEROING

The optic is delivered in a centered position. Normally, this means that only small adjustments are necessary, providing that the base is properly aligned. If you

have a red dot magnifier, sight in without using the magnifier. Work your way to “zero” by adjusting each turret in small increments.

- a. To move the point of impact to the right, turn the windage adjustment screw clockwise.
- b. To move the point of impact to the left, turn the windage adjustment screw counter clockwise.
- c. To move the point of impact up, turn the elevation adjustment screw clockwise
- d. To move the point of impact down, turn the elevation adjustment screw counter clockwise.

The total adjustment range for both windage and elevation is 60 MOA. If you suddenly encounter resistance, do NOT try to force the screw further, this can break the mechanism and render the sight unable to zero. Confirm zero by firing at least three shots at a zeroing target. After initial firing, check that the optic and mount are secure on your firearm. Check your impact points on the target to confirm accuracy and repeat until you are satisfied that the point of aim and the point of impact coincide at your desired range.

MOUNTING OPTIONS

The Classic Series Full-Sized Reflex Sight is designed to work with RMR-compatible Footprint.

DOT SIZE

The Classic Series Full-Sized Reflex Sight features a 3 MOA dot, meaning that the dot itself appears to cover roughly 3 inches of target at 100 yards. The 3 MOA dot offers an excellent compromise of both speed and accuracy.

FEATURES

- 10 Brightness Settings
- Bright LED with Lowlight and Daytime Settings
- Up to 41,000-hour Battery Life at Medium Settings
- Large 24x17mm Clear Aperture in a Compact and Light Weight Design
- Tough 6061 Aluminum Alloy Housing
- Multicoated Lens
- Backed by Primary Arms Optics Lifetime Warranty

SPECIFICATIONS

Objective Lens Diameter: 24x17mm	Total Elevation Adjustment: ≥ 60 MOA	Illumination Settings: 10 Settings
Length: 1.78 in.	Total Windage Adjustment: ≥ 60 MOA	Battery Life: 41k Hours at Medium Setting
Weight: .98 oz	Lifetime Warranty	

Specifications may vary and are subject to change without notice.

LENS CARE

Please do not use any organic solvent such as alcohol or acetone on your optic. First, blow dust or any foreign objects off of the lens. Then, use a soft cotton or microfiber lens

cloth to clean any fingerprints or smears off the lens. Alternatively, you may use a piece of professional lens paper for further cleaning, if necessary.



WARNING: Always ensure your firearm is unloaded (chamber empty and magazine removed) before installing optics or accessories.



WARNING: Improper installation of firearm parts or accessories may result in death or serious personal injury. If you are not properly trained in the installation of these parts, have them installed by a gunsmith or armorer.

REMEMBER: THE FOUR RULES OF FIREARMS SAFETY

1. Treat every firearm as if it were loaded.
2. Never let your muzzle cover anything you are not willing to destroy.
3. Keep your finger off the trigger until your sights are on target.
4. Be sure of your target and what is behind.



LIFETIME WARRANTY

Your Primary Arms Classic Series Mini Reflex Sight is covered by the Primary Arms Lifetime Warranty. If a defect due to materials or workmanship, or even normal wear and tear has caused your product to malfunction, Primary Arms will either repair or replace your product. You can find more details about our lifetime warranty at www.primaryarmsoptics.com.

Email: info@primaryarmsoptics.com
Toll-free at 855-774-2767
www.primaryarmsoptics.com

For more information on these optics, go to:
<http://primaryarmsoptics.com/>