



SLX[®] 1-8x24

**FIRST FOCAL PLANE
OPTIC MANUAL**

THANK YOU FOR CHOOSING THIS PRIMARY ARMS OPTIC

If you have any questions about your new optic or any of our other products, visit us at www.primaryarmsoptics.com, email us at info@primaryarmsoptics.com, or give us a call toll-free at 855-774-2767. The customer service team at our headquarters in Houston, Texas will respond promptly.

If you have any problems with a Primary Arms Optics product, we urge you to contact us immediately and let our customer service professionals handle the situation for you. There is no need to return your optic to the retailer.

*View back cover for lifetime warranty information.

PRIMARY ARMS SLx 1-8x24 FIRST FOCAL PLANE RIFLE SCOPE

Every Primary Arms SLx 1-8x24 FFP Rifle Scope is hand-inspected in Houston, Texas to ensure our high standard of craftsmanship. This optic is built to provide you exceptional performance from minimum

to maximum magnification, leveraging the reticle to its fullest effect. Like all other Primary Arms optics, we stand by this product for its quality and durability, and we hope it serves you well in every practice.

OPTIC FEATURES



DAYLIGHT VISIBLE

Suitable for any environment, our Daylight Visible scopes offer bold reticle illumination, visible even in broad daylight.



SHOCKPROOF

Our Shockproof optics are reinforced against impact, capable of facing the rigors of duty use.



MULTI-COATED LENS

Our Multi-Coated Lenses are treated with a special finish to reduce reflections and increase light transmission.




WATERPROOF

Our Waterproof optics are sealed for reliable function, even when fully submerged in water.



**SCAN TO SEE MORE
PRIMARY ARMS OPTICS
FEATURES**

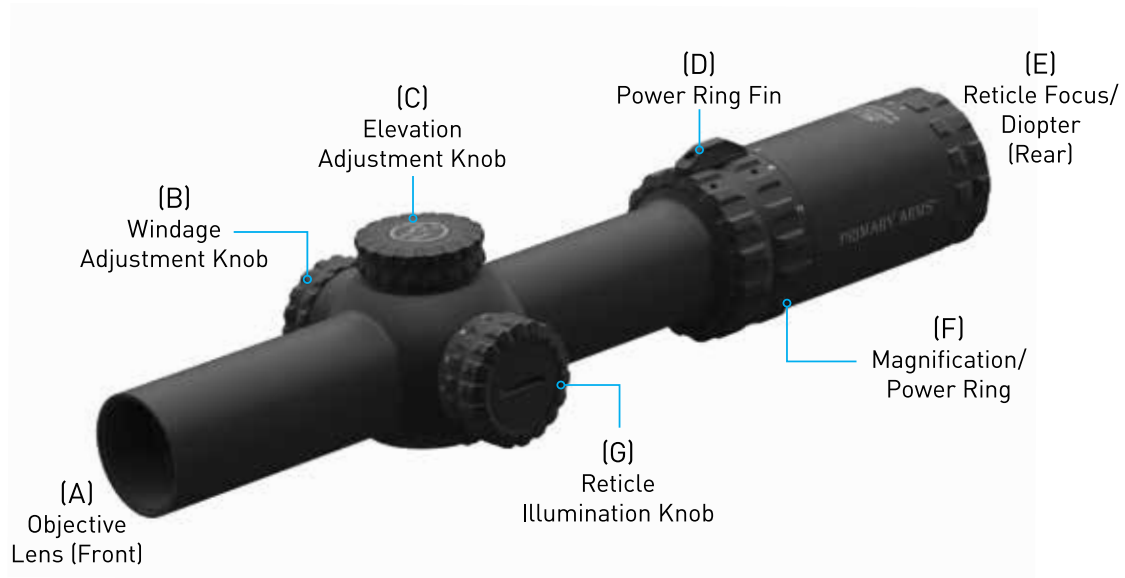

ACHIEVING A CLEAR RETICLE PICTURE

This rifle scope features an adjustable diopter. The diopter's position affects the focus of the reticle as you see it inside the scope.

Setting the diopter correctly is the critical first step to successful precision shooting.

1. Turn the power selector ring to its highest setting and point the scope at a bright, featureless background, such as blue sky or a blank white wall.

2. With your head in position behind the scope's ocular, look at the wall or sky. If you look through prescription glasses when shooting, wear them.

3. Close your eyes.

4. Open your eyes and look through the scope.

5. If the reticle appears blurry before sharpening, the diopter is not in its correct position. You must adjust the diopter ring and try again.

6. If the reticle appears sharp as soon as you look through the scope, the diopter is in its correct position. Many users will leave a witness mark at this position using paint or fingernail polish. This makes it easier to reset if the diopter is ever turned.

HOW TO ZERO YOUR OPTIC

To line up your reticle with your bullet's point of impact, you will need to zero your optic. For BDC reticles, your zeroing distance should be determined by your rifle and cartridge to ensure a close ballistic match. For MIL reticles, zeroing distance is user preference.

To zero your optic, follow these steps:

1. Using a bipod or sandbags, preferably on a bench or in the prone position, turn the Power Ring (F) to a high magnification to see your target as easily as possible.
2. Remove the turret caps. Turn the Elevation Knob (C) counterclockwise to bring the point of impact up (if your shots hit below the aiming point).
3. Turn the Windage Knob (B) counterclockwise to bring the point of impact right (if your shots hit to the left of the aiming point).
4. You can reset the indicator dial to '0' by using a screwdriver or similar tool to turn it. Be mindful not to turn the turret mechanism, as it will change your point of impact

HOW TO SET RETICLE ILLUMINATION

The Illumination Knob (G) control on the left side of the scope is marked with numbers of increasing brightness from the lowest two settings being Night Vision Compatible, and the highest two being Daylight Bright. The knob cap unscrews counterclockwise, holding a 3v CR 2032 battery with the positive (+) side facing towards the cap. The windage turret cap on the opposite side holds a spare 3v CR 2032 battery

inside. Reticle illumination at the lower settings is useful in low light situations like sunrise and sunset. The highest two settings are “daylight bright” settings. Reticle “bleed out”, abnormalities and small imperfections may be visible when viewed indoors or in low light conditions at these two settings. This is a normal result of the reticle etching process. Abnormalities at these two settings will not be visible

when viewed in daylight conditions. Using these settings in low light situations will overpower your eye’s ability to see the target and make the reticle appear distorted. The right amount of illumination creates a clear contrast between the reticle and your intended target, without straining the eye.

SLx 1-8x24FFP RIFLE SCOPE SPECIFICATION

Focal Plane: First Focal Plane	FOV @ 1x / 100 yd : 105 ft	Red Reticle Illumination, Visible in Bright Sunlight
Magnification: 1x (low) - 8x (high)	FOV @ 8x / 100 yd : 14.3 ft	Length (w/o Lens Covers): 10.3 in
Eye Relief: 3.2 – 3.3 in	Total Windage/Elevation: \geq 130 MOA/37.82 MIL	Weight (with Battery, without Lens Covers): 17.9 oz
Exit Pupil: 9 mm (low) - 3 mm (high)	Tube Diameter: 30 mm	Battery: 3v CR 2032
Objective Lens Diameter: 24 mm	Adjustment Click Value: 0.25 MOA	Warranty: Lifetime Warranty

Specifications may vary and are subject to change without notice.

SLx 1-8x24 RIFLE SCOPE FEATURES


- Red Reticle Illumination, Visible in Bright Sunlight
- Fast Focus Eyepiece
- Fog Resistant
- Fully Nitrogen Purged, IP67 Waterproof Standard and Dust Proof
- 6061 Aluminum with Anodized Matte Black
- Flip-up Lens Covers Included
- Uses one 3v CR 2032 Battery (Included)
- Backed by our Lifetime Warranty


LENS CARE

Please do not use any organic solvent such as alcohol or acetone on your scope. First, blow dust or any foreign objects off of the lens. Then, use a soft cotton or microfiber lens cloth to clean any fingerprints or smears off the lens. Alternatively, you may use a piece of professional lens paper for further cleaning, if necessary.

REMEMBER: THE FOUR RULES OF FIREARMS SAFETY

1. Treat every firearm as if it were loaded.
2. Never let your muzzle cover anything you are not willing to destroy.
3. Keep your finger off the trigger until your sights are on target.
4. Be sure of your target and what is behind it.

 **WARNING:** Always ensure your firearm is unloaded (chamber empty and magazine removed) before installing optics or accessories.

 **WARNING:** Improper installation of firearm parts or accessories may result in death or serious personal injury.
If you are not properly trained in the installation of these parts, have them installed by a gunsmith or armorer.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **INTERNAL CHEMICAL BURNS** in as little as **2 HOURS**.
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**.
- **SEEK IMMEDIATE MEDICAL ATTENTION** if a battery is suspected to be swallowed or inserted inside any part of the body.



- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.
- Ensure the batteries are installed correctly according to polarity (+ and -).
- Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries. Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

WEAPON				DATE	
SHOT NO.	DIRECTION/DEFLECTION	ELEVATION	RANGE	AMMO	DESCRIPTION

NOTES:

WEAPON				DATE	
SHOT NO.	DIRECTION/DEFLECTION	ELEVATION	RANGE	AMMO	DESCRIPTION

NOTES:



LIFETIME WARRANTY

Your Primary Arms SLx 1-8x24 Rifle Scope is covered by the Primary Arms Lifetime Warranty. If a defect due to materials or workmanship, or even normal wear and tear has caused your product to malfunction, Primary Arms will either repair or replace your product. You can find more details about our lifetime warranty at www.primaryarmsoptics.com.

Email: info@primaryarmsoptics.com
Toll-free at 855-774-2767
www.primaryarmsoptics.com



SCAN HERE for
more information
on these optics.



©Copyright 2024 PRIMARY ARMS, LLC
is a registered trademark of PRIMARY ARMS, LLC

For Patent Information go to <https://goo.gl/2z62aS>