




GLX[®] 1x MICROPRISM[™]

ACSS[®] CYCLOPS RETICLE MANUAL

GETTING TO KNOW THE ACSS® CYCLOPS RETICLE

The ACSS (Advanced Combined Sighting System) is a giant leap forward in reticle design that increases first hit ratio and decreases time on target dramatically. The Cyclops reticle combines, bullet drop compensation and range estimation into a simple-to-use sighting system. Use the horseshoe as a large, quick aiming reference for fast snap shooting up close. For precision shooting, use the tip of the chevron located inside the horseshoe.

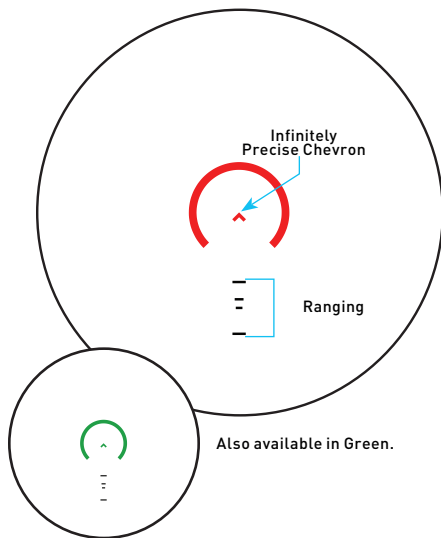


BULLET DROP COMPENSATION (BDC)

The BDC starts at the top of the chevron and will be zeroed at particular distances depending on the caliber used. The point formed by the underside of the chevron, and the area level with the bottom of the chevron, act as additional aiming references for different ranges depending on caliber. Simply aim using the area of the chevron that coincides with the range to target.


We recommend that you establish a steady, supported position in order to utilize the BDC effectively.

If you are using a cartridge or barrel length other than those listed below, the center chevron can still be used as an infinitely precise universal aiming point, allowing you to make precision shots with greater agility and efficiency.


5.56 16" BARREL




5.56 14.5" BARREL




5.56 10.5" BARREL




.308



7.62x39/300BO




300BO SUB




SHOTGUN USE

The horseshoe grabs the eye instantly for close quarters shooting and also approximates the spread pattern of #00 buckshot at 25 yards.




SHOTGUN USE

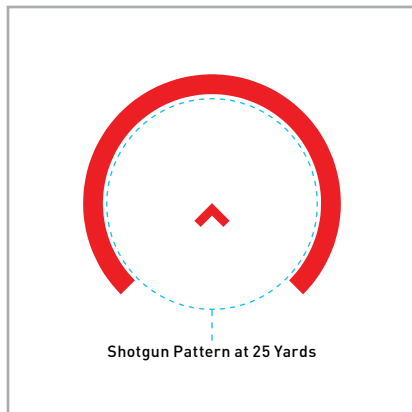

RANGE YOUR TARGET

Knowing the proper range of your target is crucial in order to use the right hold on the BDC. Starting vertically at the bottom line and measuring upwards will range estimate targets 5'10" tall. If the top of the target reaches the highest ranging line, the target is 200 yards away. Additional lines in the middle indicate 300 and 400 yard distances. Horizontal ranging is accomplished using the width of the ranging lines. Each ranging line measures an 18" wide target from side to side; match the width of the target to the appropriate ranging line to determine its distance.

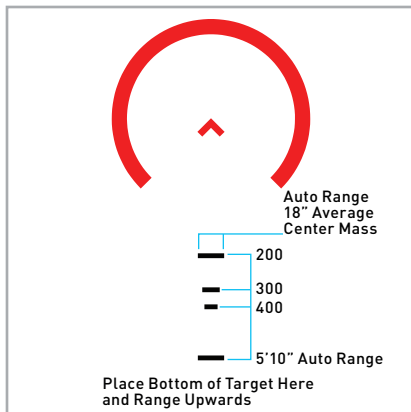

NOTES:

NOTES:



LIFETIME WARRANTY

Your Primary Arms GLx® 1x MicroPrism Optic is covered by the Primary Arms Lifetime Warranty. If a defect due to materials or workmanship, or even normal wear and tear has caused your product to malfunction, Primary Arms will either repair or replace your product. You can find more details about our lifetime warranty at www.primaryarmsoptics.com.

Email: info@primaryarmsoptics.com

Toll-free at 855-774-2767

www.primaryarmsoptics.com



SCAN HERE for
more information
on these optics.

©Copyright 2024 PRIMARY ARMS, LLC
is a registered trademark of PRIMARY ARMS, LLC

For Patent Information go to <https://goo.gl/2z62aS>